

Arc Weld Studs - No Thread Studs


NTE - NO THREAD EYE BOLT WELD STUDS - TECHNICAL DETAILS

NTE weld studs are available in mild steel and stainless steel materials.

NTE studs are commonly used for lifting parts and for assembly attachment.

To stud weld NTE studs, special chucks are required and the dual leg ferrule foot plate is preferred.

For application, dimensional and in stock assistance, please contact Sunbelt Stud Welding.

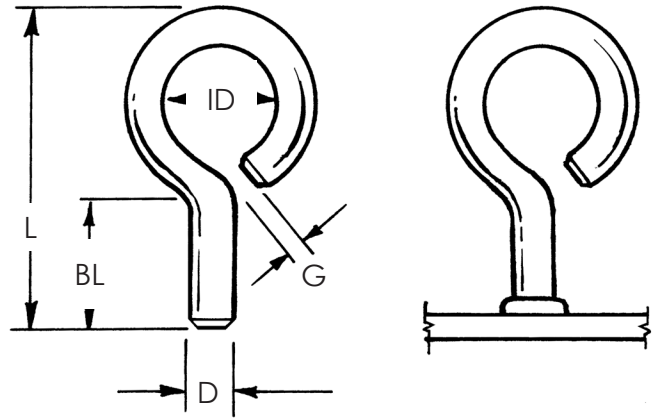

Stud Specifications						Standard Accessories		
Base Diameter	Minimum Length	Minimum Base Length	Minimum Inside Diameter	Minimum Opening	Ferrule	Foot	Grip	Chuck
D	L	BL	ID	G	P/N	P/N	P/N	P/N
0.188	1.875	0.750	0.500	0.188	F019-F	QN-018	n/a	EB-018
0.250	1.750	0.750	0.750	0.250	F025-F	QN-025	n/a	EB-025
0.312	1.875	0.750	0.750	0.313	F031-F	QN-031	n/a	EB-031
0.375	2.625	1.000	0.875	0.375	F037-F	QN-037	n/a	EB-037
0.438	3.000	1.125	1.000	0.438	F043-F	QN-043	n/a	EB-043
0.500	2.625	1.375	1.250	0.500	F050-F	QN-050	n/a	EB-050

To order or specify give: Stud Code, D x L; BL; ID; G
 Example: NTE, 3/8 x 2.75, 1.125, (BW), 0.875, 0.375, mild steel, 2000 pcs.
 Specify (L) Length, on a Before Weld basis by indicating "BW"
 or on an After Weld basis by indicating "AW."

See **Accessories** for accessory detail and **Ferrule Specifications** for ferrule options.

See **Arc Stud Welding – General Information** and **Technical Details** for industry specifications, thread options, Before Weld (BW) length, flux, raw material details, plating options, annealing, load strengths and shipping weights.

