


Refractory Weld Studs: Split Pin

REFRACTORY STUDS: SPLIT PIN

Product Code: RA SP

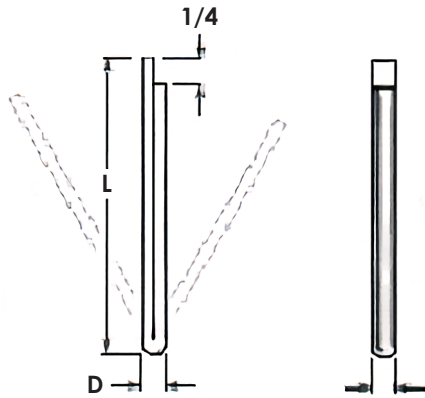

Stud		
D	Min Length	Ferrule Code
3/16"	7/8"	P250
1/4"	7/8"	P312
5/16"	7/8"	P375

	Mild Steel	Stainless Steel
Material	C - .23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	AISI grade - 302, 304, and 305 standard Other grades available upon request
Mechanical Properties	Tensile - 60,000 psi (min.) Yield - 50,000 psi (min.) Elongation - 20% (in 2 inches)	Values for various grades available upon request
Plating	Plating is not standard. Cadmium, Copper, Nickel and Zinc available upon customer request.	Does not apply to Stainless

To order or specify give: Product Code, Diameter, Length, Material and Quantity

Example: RA SP, 3/16", 7/8", Mild Steel, 1000 pcs.

See **Accessories** for accessory detail and **Ferrule Specifications** for ferrule options.

See **Arc Stud Welding – General Information** and **Technical Details** for industry specifications, thread options, Before Weld (BW) length, flux, raw material details, plating options, annealing, load strengths and shipping weights.



website www.sunbeltstudwelding.com email info@sunbeltstudwelding.com
6381 Windfern Road, Houston, TX 77040 telephone 1.800.462.9353 - Houston 713.939.8903 fax 713.939.9013