




CABLE HANGERS: BANDING-TYPE

Shipbuilding/Offshore: Cable Hangers: Banding Type: Type 7: Stamped Ferrule Option


Note: Stamped Ferrule Dimensions Typical only. Complete 180 degrees arc required

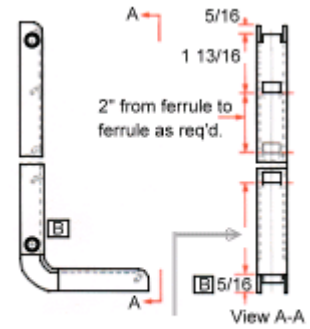

4 1/16" odd no. length increments
3 1/16" even no. length increments

Type 7 - Stamped Ferrule Option

Shipbuilding/Offshore: Cable Hangers: Banding Type: Type 8: Stamped Ferrule Option

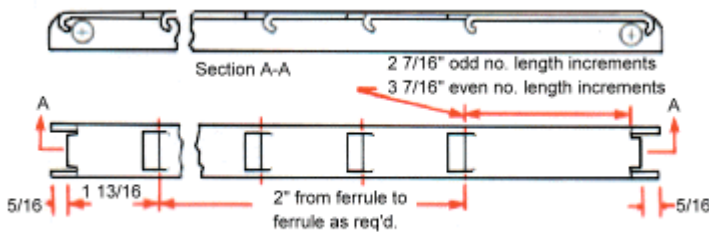

Type 8 - Stamped Ferrule Option

1. Also, all banding hangers, Types 2, 3, 7, 8, 19 and 20 can be manufactured in strict accordance with Buships DWG. 302-1716084
2. All banding hanger ferrules, PC. NOS. 1361, 1362, 1363, and 1367 manufactured in strict accordance with Buships DWG. 9000-S6202-73980, section 1, sheet 36.
3. All banding hanger slotting is on 2" centers for types 7 and 8 and on 2" centers for types 2 and 3.
4. Finish: (a) banding hangers, types 2, 3, 7 and 8 - military yellow zinc chromate.
(b) banding hangers, type 19 and 20 - zinc plated.

Note: The hanger assesorly items shown on this page are commonly used for main and local wire way runs aboard submarines. However these items are not restricted to that end use. All hangers are intended for use with standard 3/8" shouldered welding studs.

www.sunbeltstudwelding.com

Sunbelt Stud Welding, Inc.
6381 Windfern Road
Houston, Texas 77040-4915



1-800-462-9353
713-939-8903
fax 713-939-9013