




SELF LOCKING WASHERS - ROUND

To order or specify give:

Product Code: **WCN** Diameter: Type: Specify Material: Specify
Pin on which washer is to be used

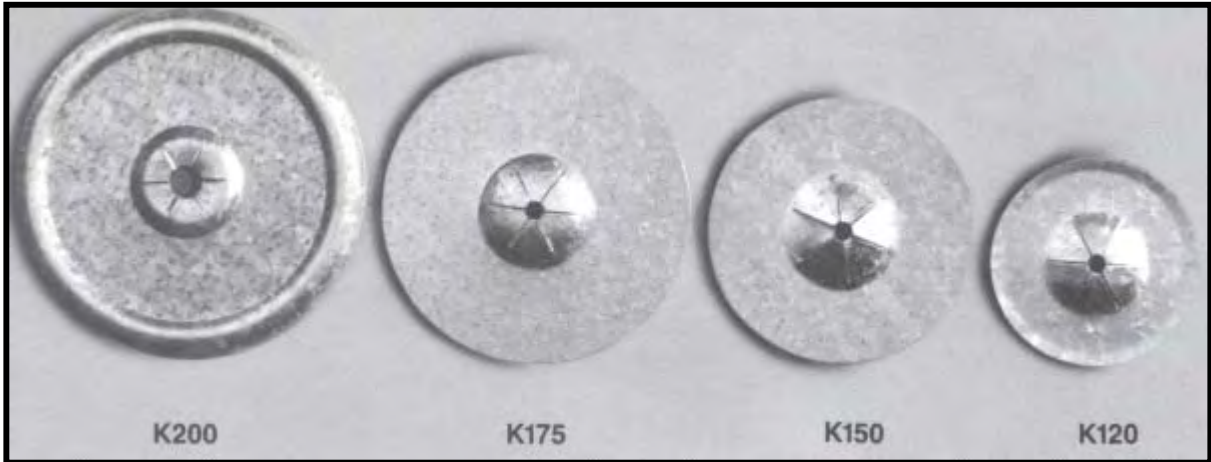

TYPE	K200	K175	K150	K120
SIZE	2"	1-3/4	1-1/2	1-3/16
THICKNESS	.015 nom.	.015 nom.	.015 nom.	.015 nom.
MATERIAL	Mild Steel	Mild Steel	Mild Steel	Mild Steel
PLATING	Galvanized	Galvanized	Galvanized	Galvanized
EDGES/FLAT OR BEVELED	beveled	flat	flat	beveled
OTHER MATERIALS AVAILABLE	Alum., S.S.	Alum., S.S.	Alum., S.S.	---
PACKED PER CARTON	2000	1000	1000, 5000	1000, 5000
SHIPPING WEIGHT PER 1,000	19 lbs.	10-1/2 lbs.	8 lbs.	6 lbs.

SUNBELT Self-Locking Washers are used in conjunction with SUNBELT weld pins, insul-anchors and lacing anchors to fasten insulation in place. Simply press the self-locking washer onto the pin up against the insulation until the desired position is reached and then clip off, or bend over, the remaining portion of pin for a permanent attachment.

The choice between round or square self-locking washers is basically a matter of aesthetics or personal preference. The domed, multi-lanced hole design provides for ease of locating washer on pin and positive self-locking. Some styles of washers are manufactured with a beveled edge to prevent the washer from cutting into the insulation facing. SUNBELT Self-Locking Washers are available according to the chart above and with standard 10 GA, 12 GA, or 14 GA hole sizes off-the-shelf. Other material/plating combinations and hole sizes are available by special order.

www.sunbeltstudwelding.com

Sunbelt Stud Welding, Inc.
6381 Windfern Road
Houston, Texas 77040-4915



1-800-462-9353
713-939-8903
fax 713-939-9013