




## SELF LOCKING WASHERS (SQUARE)

**To order or specify give:**

Product Code: **WCN**      Diameter:      Type: Specify      Material: Specify  
**Pin on which washer is to be used**

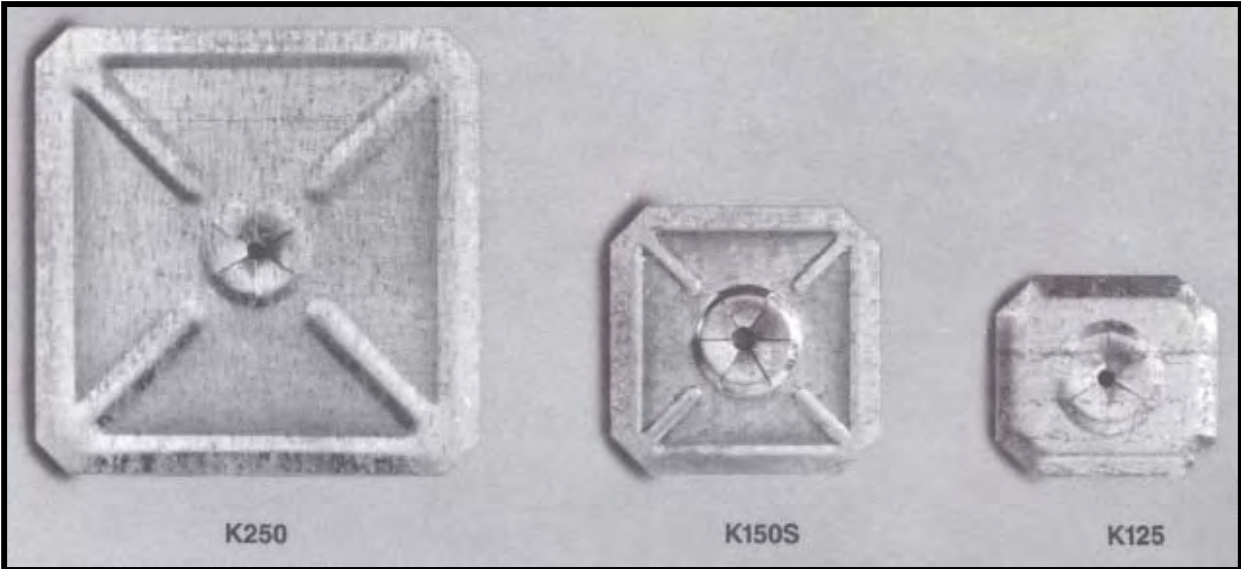

TYPE	K250	K150S	K125
SIZE	2-1/2 x 2-1/2	1-1/2 x 1-1/2	1-1/4 x 1-1/8
THICKNESS	.015 nom.	.015 nom.	.015 nom.
MATERIAL	Mild Steel	Mild Steel	Mild Steel
PLATING	Galvanized	Galvanized	Galvanized
EDGES/FLAT OR BEVELED	beveled	beveled	beveled
OTHER MATERIALS AVAILABLE	Alum., S.S.	Alum., S.S.	Alum., S.S.
PACKED PER CARTON	1000	3000	1000, 5000
SHIPPING WEIGHT PER 1,000	28 - 1/2 lbs.	10 lbs.	6 lbs.

**SUNBELT** Self-Locking Washers are used in conjunction with **SUNBELT** weld pins, insul-anchors and lacing anchors to fasten insulation in place. Simply press the self-locking washer onto the pin - against the insulation until the desired position is reached and then clip off, or bend over, the remaining portion of pin for a permanent attachment.

The choice between round or square self-locking washers is basically a matter of aesthetics or personal preference. The domed, multi-lanced hole design provides for ease of locating washer on pin and positive self-locking. Some styles of washers are manufactured with a beveled edge to prevent the washer from cutting into the insulation facing. These washers are available according to the chart above and with standard 10 GA, 12 GA, or 14 GA hole sizes off-the-shelf. Other material/plating combinations and hole sizes are available by special order.

[www.sunbeltstudwelding.com](http://www.sunbeltstudwelding.com)

**Sunbelt Stud Welding, Inc.**  
 6381 Windfern Road  
 Houston, Texas 77040-4915



**1-800-462-9353**  
**713-939-8903**  
**fax 713-939-9013**