


# Refractory Weld Studs: "Y" Anchor

## REFRACTORY STUDS: "Y" ANCHOR

Product Code: RA Y

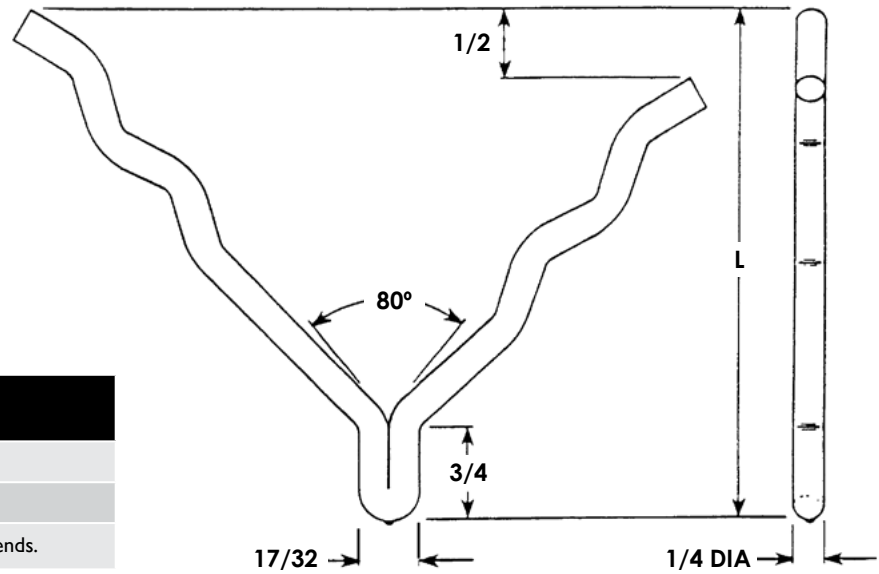

Stud	
Min Length	2-7/16"
Ferrule Code	RA250
Studs shorter than L MIN will have no bends.	

	Mild Steel	Stainless Steel
Material	C - .23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	AISI grade - 304, 310, 316 and 330 standard Other grades available upon request
Mechanical Properties	Tensile - 60,000 psi (min.) Yield - 50,000 psi (min.) Elongation - 20% (in 2 inches)	Values for various grades available upon request

To order or specify give: Stud Code, Diameter 1/4", Length: L, Material and Quantity

Example: RA Y, 1/4", 2-7/16", Mild Steel, 1000 pcs.

See **Accessories** for accessory detail and **Ferrule Specifications** for ferrule options.

See **Arc Stud Welding – General Information** and **Technical Details** for industry specifications, thread options, Before Weld (BW) length, flux, raw material details, plating options, annealing, load strengths and shipping weights.



website [www.sunbeltstudwelding.com](http://www.sunbeltstudwelding.com) email [info@sunbeltstudwelding.com](mailto:info@sunbeltstudwelding.com)  
6381 Windfern Road, Houston, TX 77040 telephone 1.800.462.9353 - Houston 713.939.8903 fax 713.939.9013