

# Arc Weld Studs - Rectangular Studs


## RT - RECTANGULAR “T” SLOT WELD STUDS - TECHNICAL DETAILS

RT weld studs are available in mild steel and stainless steel materials.

RT studs are commonly used for securing wire mesh to furnaces. After installation, the mesh is filled with refractory material.

To stud weld RT studs, rectangular chucks, standard foot pieces and standard ferrule grips are typically used.

For application, dimensional and in stock assistance, please contact Sunbelt Stud Welding.

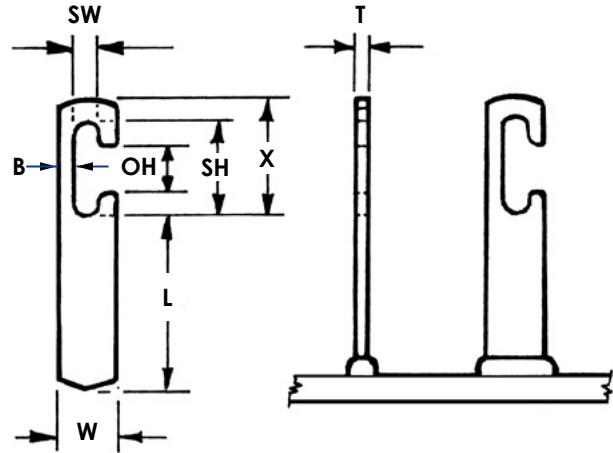

Stud Specifications						
Thickness	Width	Length (Min.)	"T" Slot Details			Ferrule
T	W	L	OH	X	SW	P/N
0.125	0.375	0.250	0.34	0.75	0.13	F037-R I
0.125	0.625	0.313	0.56	1.25	0.25	F062-R I

STUDS WILL BE APPROXIMATELY 1/8" SHORTER AFTER WELDING.

To order or specify give: Stud Code, T x W x L, Material and Quantity

Example: RH, 0.125 x 0.625 x .75, (BW), mild steel, 1000 pcs.

Specify (L) Length, on a Before Weld basis by indicating "BW"  
or on an After Weld basis by indicating "AW."

See **Accessories** for accessory detail and **Ferrule Specifications** for ferrule options.

See **Threaded and No-Thread Weld Studs – Technical Details** for industry specifications, thread options, Before Weld (BW) length, flux, raw material details, plating options, annealing, load strengths and shipping weights.



website [www.sunbeltstudwelding.com](http://www.sunbeltstudwelding.com) email [info@sunbeltstudwelding.com](mailto:info@sunbeltstudwelding.com)  
6381 Windfern Road, Houston, TX 77040 telephone 1.800.462.9353 - Houston 713.939.8903 fax 713.939.9013